




Firma: STD Comp  
Adresa: Vojvode Putnika 51  
Telefon: 069/853-90-69  
Fax:  
PIB: 111971285  
E-mail: stdcomp015@gmail.com

Intel SSD E 7000s Series (150GB, M.2 80mm  
SATA 6Gbs, 3D1, MLC) Generic Single Pack ( SSDSCKJR150G7XA )

Šifra: 12669  
Kategorija proizvoda: SSD  
Proizvođač: INTEL

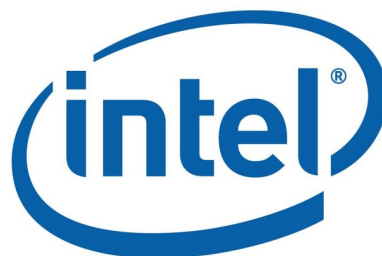

Cena: **4.160,00** rsd.

|                                        |                                                                                                                                   |
|----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| Device Location:                       | Plug-in Card                                                                                                                      |
| Form Factor:                           | M.2 (2280)                                                                                                                        |
| Storage Capacity:                      | 150 GB                                                                                                                            |
| Supports Data Channel:                 | SATA III-600                                                                                                                      |
| External Data Bit Rate:                | 6 Gbps                                                                                                                            |
| Memory Technology:                     | NAND Flash                                                                                                                        |
| Flash Memory Cell Technology:          | Multi-Level Cell                                                                                                                  |
| Lithography:                           | 16 nm                                                                                                                             |
| Maximum Random Read Rate:              | 40000 IOPS                                                                                                                        |
| Maximum Random Write Rate:             | 27000 IOPS                                                                                                                        |
| Maximum Sequential Read Rate:          | 170 MBs                                                                                                                           |
| Maximum Sequential Write Rate:         | 140 MBs                                                                                                                           |
| Total Bytes Written (TBW):             | 412 TB                                                                                                                            |
| M.2 Interface Quantity:                | 1                                                                                                                                 |
| Non-Recoverable Errors:                | 1 per 10 <sup>17</sup>                                                                                                            |
| Mean Time Between Failures:            | 2000000 hr                                                                                                                        |
| Solid State Drive Features:            | AES 256-bit Encryption<br>End-to-End Data Protection<br>Enhanced Power Loss Data Protection<br>Temperature Monitoring and Logging |
| Shock Tolerance Operating:             | 1000G @ 0.5ms                                                                                                                     |
| Shock Tolerance Storage:               | 1000G @ 0.5ms                                                                                                                     |
| Vibration Tolerance Operating:         | 2.17G @ 5-700Hz                                                                                                                   |
| Vibration Tolerance Storage:           | 3.13G @ 5-800Hz                                                                                                                   |
| Maximum Power Consumption:             | 2 W                                                                                                                               |
| Minimum Power Consumption:             | 600 mW                                                                                                                            |
| Maximum Operating Ambient Temperature: | 70 °C                                                                                                                             |
| Minimum Operating Ambient Temperature: | 0 °C                                                                                                                              |
| Nominal Weight:                        | 0.009 kg                                                                                                                          |
| Package Type:                          | Retail                                                                                                                            |
| Warranty Products returnable:          | Yes                                                                                                                               |

Cene su informativnog karaktera. Prodavac ne odgovara za tačnost cena iskazanih na sajtu, zadržava pravo izmena cena. Ponudu za ostale artikle, informacije o stanju lagera i aktuelnim cenama možete dobiti na upit. Plaćanje se isključivo vrši virmanski - bezgotovinski.